

MAIN ACCESSORIES (for an updated and exhaustive list visit www.wisyc.com)

SL54-IK: "Slot-in" compatible with Sound Device SuperSlot, MRK16 Multi Slot rack, Unislot (Ikegami, Panasonic cameras)

BPA54: "Stand alone" rear panel (2 mini XLR-5pin male outputs + 1 Hirose for power)

CDC34: External power feeding cable, hirose 4pin Male/raw wires (50 cm)

SL54-SX: "Slot-in" kit for Sony camera

CAM50-3: AF cable (50 cm), mini XLR-5F / 2 XLR-3M connectors

CAM50-41: AF cable (50 cm), mini XLR-5F / 1 XLR-3M connector (Line 1)

CAUSBC1: USB Cable 1m
USB B - USB C Male Black

BCA54: Stand Alone with lithium battery pack RRC2040 33.2Whr
- 2 mini XLR-5pin male audio outputs
- 1 Hirose connector for external power

EU DECLARATION OF CONFORMITY

Manufacturer's Name: WISYCOM S.r.l.

Manufacturer's Address: via Tiepolo , 7/E- 35019 Tombolo (PD) - Italy

declare under our sole responsibility that the product

Model MCR54

Description Wireless ENG receiver

conforms to the essential requirements of the RADIO Directive 2014/53/EU

– Radio Equipment Directive (RED):

EN 300 422-1 v2.1.2

EN 301 489-1 v1.9.2

EN 301 489-9 v1.4.1

EN 62368-1 2014

EN 50581 2012

USA and CANADA

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1 - This device may not cause harmful interference, and
- 2 - This device must accept any interference received, including interference that may cause undesired operation.

In compliance with:

USA 47 CFR 15 Subpart B

CAN RSS-Gen/CNR-Gen

Serial Number:

Purchase Date:

This guide is intended to assist you with initial quick setup and operation for your Wisycom product.

You can refer to Wisycom Authorized Distributors for technical Support and information about service and repairs available in your area or contact us directly by email.

WISYCOM ITALY

Via Tiepolo 7/E
35019 Tombolo (PD) - ITALY

+39 0424 382605

support@wisyc.com
sales@wisyc.com

WISYCOM USA

5228 Eisenhower Avenue
Alexandria, VA 22304 - USA

+1 (888) WISYCOM
+1 (888) 947-9266

support@wisyc.com
sales@wisyc.com


Download Documentation and Firmware

Get latest user manual, tips, specifications, firmware & software on the download page:
wisyc.com/products/d/MCR54


Product Registration and Warranty

Register your product to extend your warranty and receive update on latest firmware:
wisyc.com/registration


Keep up with Wisycom online

Follow us on Facebook and Instagram. You can also subscribe on Youtube for more.
wisyc.com/social



Aux/Top Output

Mini XLR 5pin connector for 2 analog channels or 4 digital channels outputs (2 x AES3)

PWR Button

Press & hold to switch ON/OFF the unit.
Short press to step back into menu

Menu Button


Press this button to enter the main menu and select menu options.
Press and hold to **SAVE**

Headphones

Short Press **PWR+MENU** to access headphone menu

(*) RX STATUS LED (1/2/3/4)

- — **OFF:** receiver is not active
- — **RED:** RF level/quality below audio squelch (mute)
- - - **RED BLINK:** frequency out of current filter band (32MHz)
- — **GREEN:** level above audio squelch & antenna A is active
- — **BLUE:** level above audio squelch & antenna B is active

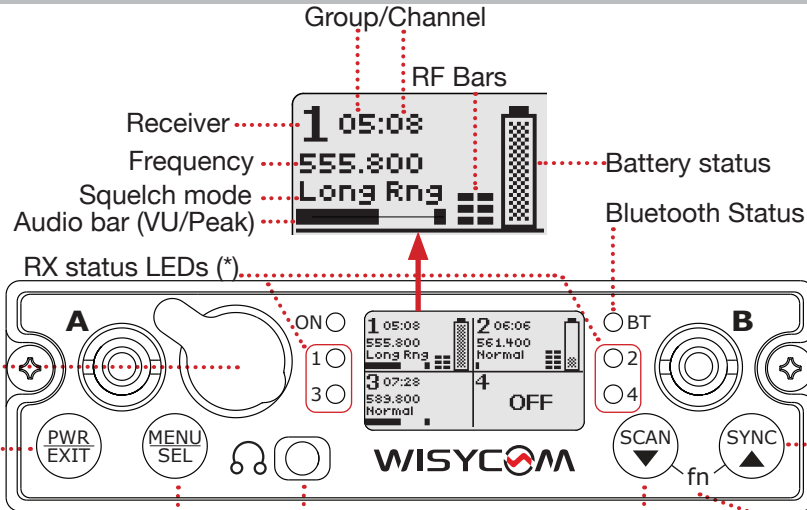

Antenna A/B(**)

When the MCR54 turns on, a message will tell you which antennas to use

Sync/Up

Press & hold to launch a **SYNC** with a Wisycom transmitter.
Short Press to scroll up into the main menu or to access the rotary quick menu.

Fn

Short Press **Scan+Sync** to access custom function menu

Scan/Down

Press & hold to launch a freq. **SCAN**.
Short Press to scroll down into the main menu or to access the rotary quick menu.

	Color	Code	Band MHz	L (mm)
Antenna type (**)	black	AWS-BK	470-608	132
	yellow	AWS-YL	570-694	111
	green	AWS-GN	670-870	78
	blue	AWS-BL	940-1160	63
	red	AWS-RD	1240-1260	55